

DS-KIS604-P(C) IP video intercom kit



- IP video intercom kit for villa or house
- One call button for easier calls
- Convenient Hik-Connect APP Mobile Control
- Stores messages and captured pictures in the TF card
- Including: DS-KV8113-WME1(C) x 1, DS-KH6320-WTE1 x 1, DS-KABV8113-RS/Surface x 1, Administrator card x 1, Key fob x 5, PSU x2

**IP video intercom kit for villa or house, only one call button.*

**DS-KV8113-WME1(C) x1*

**DS-KH6320-WTE1 x1*

**PSU x2*


**16GB TF card x1*

▪ Specification

Door station	
Operation system	Embedded Linux operation system
Flash	32 M
RAM	256 M
Door station	
Supplement light	IR supplement
Resolution	Main stream : 1920 × 1080p, 1280 × 720p Sub stream : 1280 × 720p, 640 × 480p
Lens	1
WDR	Support
FOV	Horizontal: 124° Vertical: 75°
Video compression standard	H.264; h.265; MJPEG
Door station	
Audio input	Built-in omnidirectional microphone
Audio output	Built-in loudspeaker (more than 80 dB within 30 cm)
Volume adjustment	Adjustable
Audio compression standard	G711U、 G711A、 G726、 AAC_LC、 AAC_LD、 OPUS、 G722.1
Audio compression Rate	64 Kbps
Audio quality	Noise suppression and echo cancellation
Door station	
User capacity	2000
Door station	
Network protocol	TCP/IP, RTSP
Wired network	10/100 Mbps self-adaptive Ethernet
Wi-Fi	Wi-Fi 802.11 b/g/n
3G/4G	/
Bluetooth	/
Door station	
Network interface	1
RS-485	2
Lock control	2
Exit button	2 Max.
Door contact	2
Alarm input	4
Alarm output	0
Power interface	1
TAMPER	1
TF card	1 (reserved)
Door station	
Button	1
Power consumption	< 10 W
Indicator	3
Working temperature	-40° C to 53° C (-40° F to 127.4° F)
Power supply	Standard PoE/12 VDC


Working humidity	10% to 95%
Dimension	174 mm × 91 mm × 29 mm
Installation	Surface mounting
Protection level	IP65, IK08
Application environment	Outdoor
Weight	380 g
Indicator	3
Power supply	IEEE802.3af, standard PoE 12 VDC
Indoor station	
Operation system	Embedded Linux operation system
Memory	128 MB
Flash	32 MB
Indoor station	
Display screen	7-inch colorful TFT screen
Display resolution	1024 × 600
Operation method	Capacitive touch screen
Indoor station	
Audio input	Built-in omnidirectional microphone
Audio output	Built-in loudspeaker
Audio quality	Noise suppression and echo cancellation
Audio compression standard	G.711 U
Audio compression Rate	64 Kbps
Indoor station	
Wired network	10/100 Mbps self-adaptive
Network interface	1 RJ-45 10/100 Mbps self-adaptive
Wireless network	Wi-Fi 802.11 b/g/n
Protocol	TCP/IP, SIP, RTSP
Indoor station	
RS-485	1
Alarm input	8-ch alarm inputs
Relay output	2
TF card	Max to 32 G, SD 2.0 or lower version
Indoor station	
Power consumption	≤ 6 W
Power supply	Standard PoE, 12VDC
Working temperature	-10 °C to 55 °C (14 °F to 131 °F)
Working humidity	10% to 90%
Dimension (L × W × H)	200 mm × 140 mm × 15.1 mm (7.9" × 5.5" × 0.6")

▪ Dimension

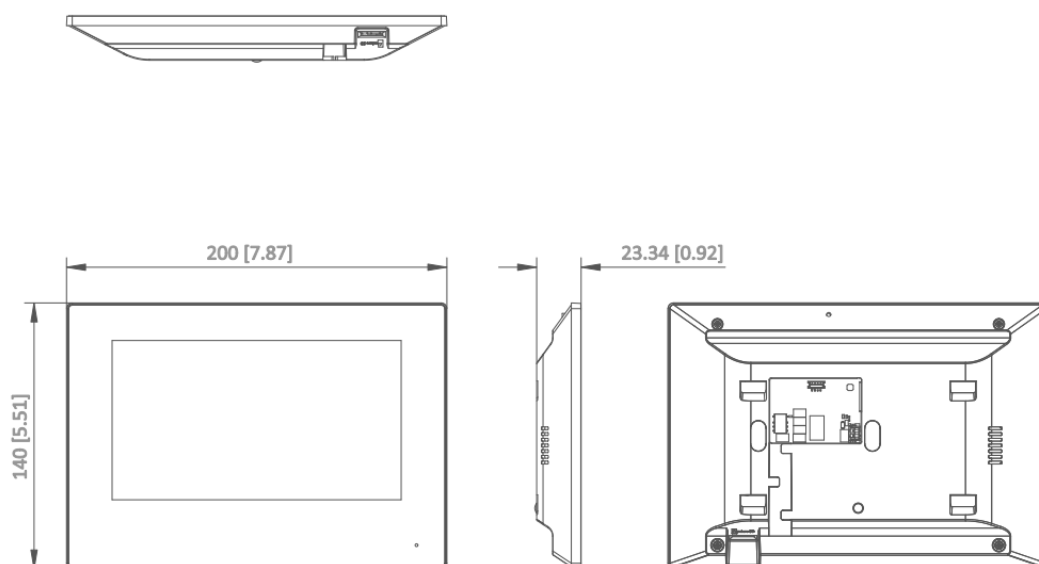

Unit:mm [inch]

SCALE 1:1

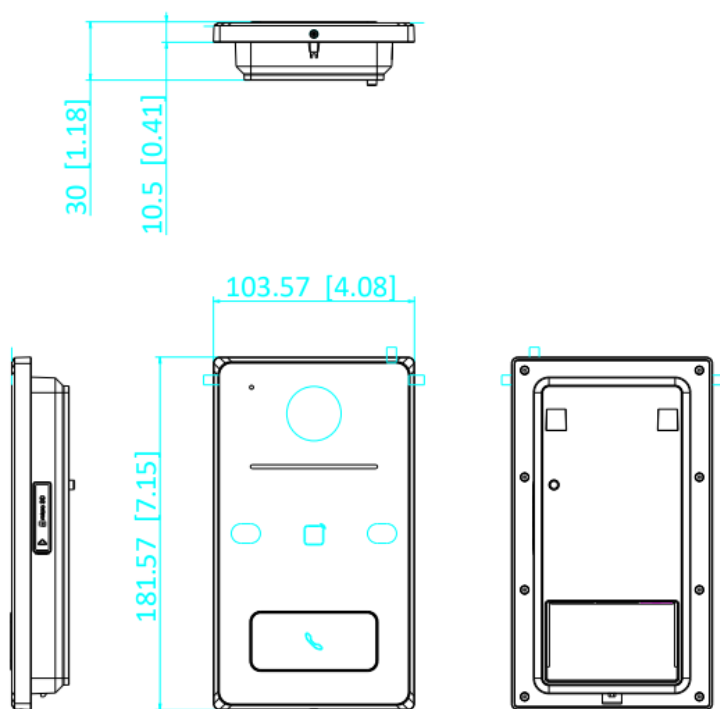

Unit:mm [inch]

See Far, Go Further



www.hikvision.com
support@hikvision.com

